



E9350 OLPBW


Hose Guide Roller Position



A suffix code (see diagram) must be added after the model number to specify desired position. Reels are shipped in the BW position unless specified otherwise. FF 95/9600 in BW only.

Spring Driven Air/Water/Oil/Grease Series E9000 - 1/2", 3/4", 1", 1 1/4", 1 1/2" I.D.

These mobile base reels offer the greatest amount of stability for high volume air, water, fuel and petroleum. Ideal for portable service trucks, permanent service or plant work areas. Basic reels without hose will handle air, water or oil; consult Reelcraft for other applications.

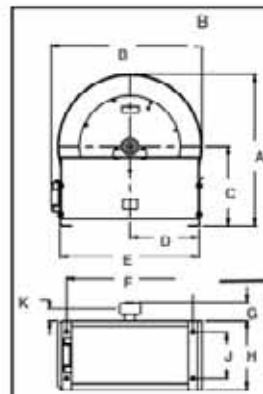

Four 7/16" (11.2mm) diameter mounting holes.

	DIMENSIONS					
	E9000		FE9000		D9000	
	in / mm		in / mm		in / mm	
A	26 1/4	667	26 1/4	667	26 1/4	667
B	26 1/4	667	26 1/4	667	26 1/4	667
C	13 3/4	349	13 3/4	349	13 3/4	349
D	12 1/8	308	12 1/8	308	12 1/8	308
E	24 1/4	616	24 1/4	616	24 1/4	616
F	22 1/4	562	22 1/4	562	22 1/4	562
G	3 3/4	95	7	178	7 3/4	197
H	12	305	17 1/2	445	13 1/4	337
J	7 3/4	197	13 1/2	343	13 1/2	343
K	2 3/4	70	7 1/2	191	7 1/2	191

MODELS WITH HOSE			HOSE CAPACITY							MODELS WITHOUT HOSE		
MODEL	WEIGHT	PRESSURE	I.D.	O.D.	(M)NPTF OUTLET	(F)NPTF INLET	LENGTH	MODEL	WEIGHT	PRESSURE		
	lbs / kg	psi / bar							in / mm	in / mm	in	ft / m
LOW PRESSURE AIR/WATER REELS* Maximum Temperature 150° F (65° C)												
E9299 OLP	127 58	300 21	1/2 13	.844 22	1/2	1/2	100 31	E9200 OLP	115 52	500 35		
E9350 OLP	140 64	250 18	3/4 19	1.188 31	3/4	3/4	50 15	E9300 OLP	115 52	500 35		
FE9350 OLP §	140 64	50 3.5	3/4 19	1.188 31	3/4	3/4	50 15	FE9300 OLP	115 52	500 35		
E9375 OLP	152 69	250 18	3/4 19	1.188 31	3/4	3/4	75 23	E9300 OLP	115 52	500 35		
NEW D9399 OLPBW	143 65	250 18	3/4 19	1.188 31	3/4	3/4	100 31	D9305 OLPBW	113 51	500 35		
E9450 OLP	157 72	250 18	1 25	1.500 31	3/4	1	50 15	E9400 OLP	115 52	500 35		
FE9450 OLP §	157 72	50 3.5	1 25	1.500 31	3/4	1	50 15	FE9400 OLP	115 52	500 35		
NOT AVAILABLE WITH HOSE			1 1/4 32	1.750 45	1 1/4	1 1/4	50 15	FF9500 OLPBW	125 57	300 35		
NOT AVAILABLE WITH HOSE			1 1/2 38	2.000 51	1 1/2	1 1/2	50 15	FF9600 OLPBW	125 57	300 35		
MEDIUM PRESSURE OIL REELS** Maximum Temperature 210° F (99° C)												
E9275 OMP	131 60	2000 138	1/2 13	.815 22	1/2	1/2	75 23	E9200 OMP	117 52	3000 207		
E9350 OMP	142 65	1250 86	3/4 19	1.188 31	3/4	3/4	50 15	E9300 OMP	117 52	3000 207		
HIGH PRESSURE GREASE REELS*** Maximum Temperature 210° F (99° C)												
E9175 OHP	153 70	4000 276	3/8 10	.750 22	1/2	3/8	75 23	E9100 OHP	118 54	5000 345		

§ Models equipped with fuel grade hose. UL330 and VLC approved hose. 250 PSI minimum burst (17 Bar)

*Low pressure reels furnished standard with PVC hose. / **Medium pressure reels are furnished standard with S.A.E. 100 R1T one wire braid hose.

***High pressure reels furnished standard with SAE 100R2T two wire braid hose suitable for grease applications only.

For all metric thread connections over 1/2" add the suffix number 70 to indicate BSPT threads - example E9300 OLP/70. FF9500 and FF9600 models will have BSPP threads.

Note: To specify our lighter duty model, change prefix from E to D. Not available on FE9500 or FE9600.

Modification - Reels without hose can be modified to handle gasoline and diesel fuel, to order place prefix "F" before model number - example (FF9300 OLP).

See Page 55 for inlet hose assemblies and adjustable bumper stops.

