



Hand Crank Reels - General Use & Pressure Washer



H series reels are an economical reel designed for medium duty applications requiring long lengths of hose. Equally suited for plant or field use such as general industrial, pest control, steam cleaning, pressure washing and more. Shipped completely assembled, ready to install.

- Features:**
- Adjustable spool rotation drag eliminates hose backlash when de-reeling
 - Durable powder coat finish
 - All bolted frame construction
 - Steel drum
 - Full flow shaft and swivel

Model	Hose I.D. mm	Hose O.D. mm	Length m	Weight kgs	Pressure psi
LOW PRESSURE REELS: Maximum Temperature 65°C					
H16000	10	18	91	15	35
H26000	10	18	137	16	35
H18005	13	22	53	15	69
H18000	13	22	61	15	69
H28005	13	22	91	16	69
H28000	13	22	91	17	69
H19000	19	31	30	15	69
H29005	19	31	30	16	69
H29000	19	31	46	19	69
MEDIUM PRESSURE REELS: Maximum Temperature 99°C					
H16000 M	10	18	91	15	207
H26000 M	10	18	137	16	207
H18005 M	13	21	61	15	207
H18000 M	13	21	61	16	207
H28000 M	13	21	91	19	207
H19000 M	19	31	24	18	207
H29000 M	19	31	38	16	207
HIGH PRESSURE REELS: Maximum Temperature 99°C					
H16000 H	10	19	76	15	345
H26000 H	10	19	122	16	345

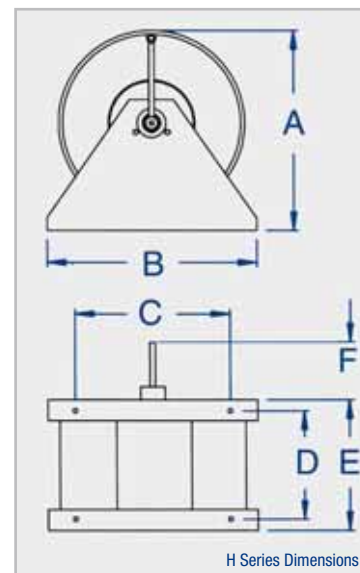

Dimensions - mm						
Model	A	B	C	D	E	F
H16000						
H18000	493	508	381	254	318	146
H19000						
H26000						
H28000	493	508	381	407	470	146
H29000						
H18005	512	356	254	254	318	146
H28005	512	356	254	407	470	146
H29005						

Note:

Reels are supplied standard without hose.