

Better by Design



Adjustable Bumper Stop

Allows any desired length of cord to be maintained outside the reel

Corrosion-Resistant

Steel components are individually powder coated to virtually eliminate corrosion

Reelcraft offers eight styles of outlets and lamps

- Single receptacle
- Duplex outlet box w/ GFCI (F) - 2 styles available
- R.V. plug
- Fluorescent - 2 styles available
- Incandescent - 2 styles available

Easy to Mount

Attaches to most structurally sound surfaces. Edges are curved for safety

Adjustable Guide Arm

Multiple guide arm positions for versatile uses and easier field adjustment

Trouble-Free Performance

Fewer components increase the service life of the reel and improve performance

Enclosed Drive Spring

Drive mechanism is enclosed for protection against the environment

Long Life Drive Spring

Declutching arbor virtually eliminates possibility of spring damage due to reverse winding of reel spool

Structural Strength

Robotically welded heavy gauge steel frame





MODEL NUMBER SIGNIFICANCE

This chart is for reference purposes only. Reels cannot be ordered by selecting from this chart. Please see Selection Charts on pages 44-45 or consult manufacturer for any questions about option combinations.

BUMPER ASSEMBLIES FOR CORD REELS

PART NUMBER	OUTSIDE DIA. OF CORD	CORD SPECIFICATIONS		
		AWG / mm ²	# Cond.	Type
600193	.320" - .530"	16 1.33	3	SJO
1-HR1004-A	.438" - .624"	12 3.32	3	SJO
600267	.645"	10 5.37	3	SO
1-HR1004	.625" - .749"	12 3.32	3	SO
3-HR1004-3	1.06" - 1.30"	6 8.00	3	SO

SERIES 4000 & 5000 CORD REELS			FOR REFERENCE ONLY
L 4 0 5 0 1 6 3 3			
LATCH TYPE L = LATCHING C = CONSTANT TENSION	WIRE SIZE 10 = 10 GAUGE 12 = 12 GAUGE 16 = 16 GAUGE	STYLE NUMBERS NONE = OPEN END 1 = INCANDESCENT LAMP 2 = FLUORESCENT LAMP 3 = SINGLE RECEPTACLE 4 = R.V. PLUG (M) 5 = INCANDESCENT NON-SPARKING 6x = FLUORESCENT EXPLOSION PROOF 7 = DUPLEX OUTLET BOX (F) W/GFCI 8 = FLUORESCENT W/OUTLET	
REEL SERIES 40 = 4000 SERIES REEL 45 = 4500 SERIES REEL 55 = 5500 SERIES REEL 57 = 5700 SERIES REEL	LENGTH OF CORD 00 = W/O CORD 35 = 35 FEET 45 = 45 FEET 50 = 50 FEET	NO. OF CONDUCTORS 2 = TWO CONDUCTOR 3 = THREE CONDUCTOR	
 CSA CERTIFIED  UL LISTED			

POWER SOURCE STYLE OPTIONS

Style #7

Metal outlet box with dual 20 AMP receptacles and GFCI protection with flip-top lid.



The GFCI Receptacle is designed to protect people from the line-to-ground shock hazards which could occur from defective power tools or appliances operating from this device or from down line outlets protected by it.

Style #4

Male rubber plug used with recreational vehicles (RV's).



Style #3 Two Options #600209

Single 15 AMP receptacle with clamp type strain relief. (Cord size - 16 AWG)



#600251

Single 15 AMP receptacle with clamp type strain relief. (Cord size - 12 AWG)

Style #3A

Single 20 AMP receptacle.



Style #3B


Single 20 AMP receptacle with twist lock connector.



The Ground Fault Circuit Interrupter does not protect against short circuits or overloads. This is the function of the fuse or circuit breaker.



- ✓ Spring retractable with latch
- ✓ Compact for critical space requirements
- ✓ Durable abrasion and corrosion resistant baked-on powder coat finish
- ✓ Wall, ceiling or bench mount
- ✓ Engineered for industrial use
- ✓ All models supplied with cord are complete with approximately 4-5 foot pigtail and three-prong plug
- ✓ Adjustable cord stop



Series 4000 and 5000 models have four 5/16" diameter mounting holes. Series L5700 "E" dimension is 12 1/2".

	DIMENSIONS					
	L4000 L4500		L5000 L5400		L5500 L5700	
	in / mm		in / mm		in / mm	
A	13 1/4	337	14 1/2	369	17 1/2	445
B	12 5/8	321	13 3/4	350	16 1/2	419
C	8	203	9 3/4	248	9 3/4	248
D	2 1/2	64	2 1/2	64	2 1/2	64
E	9 3/8	239	12 1/2	318	12 1/2*	318
F	1 3/4	45	2 1/8	54	2 1/8	54

* Series L5700 "E" dimension is 12 1/2"



L 4050 163 3



L 4545 123 7



L 5700



POWER CORD & CABLE REEL SELECTION CHART For indoor non-weather tight applications only

MODEL	ACCESSORY	CORD SPECIFICATIONS				VOLTS *	AMPS	WEIGHT	
		AWG / mm ²	No. Cond.	Length ft / m	Type			lbs / kg	
L 4035 163 3	Single Receptacle	18 1.33	3	35 11	SJTOW	115	13	22	10
L 4050 163 3	Single Receptacle	16 1.33	3	50 15	SJTOW	115	13	26	12
L 4545 123 3	Single Receptacle	12 3.32	3	45 14	SJEOW	115	15	28	13
L 5550 123 3	Single Receptacle	12 3.32	3	50 15	STOW	115	15	47	21
L 4545 123 3A	Single Connector	12 3.32	3	45 14	SJEOW	125	20	29	14
L 4545 123 3B	Twist Lock Connector	12 3.32	3	45 14	SJEOW	125	20	29	14
L 5750 103 4	R.V. Plug	10 5.37	3	50 15	SO	115	35	50	23
L 7035 064 4	R.V. Plug	6 —	4	35 11	SO	220	50	88	40
L 4545 123 7A	Duplex Outlet Box w/GFCI (F)	12 3.32	3	45 14	SJEOW	125	20	28	13
L 4545 123 7	Duplex Outlet Box w/GFCI (F)	12 3.32	3	45 14	SJEOW	115	**20	29	14
L 5550 123 7	Duplex Outlet Box w/GFCI (F)	12 3.32	3	50 15	STOW	115	**20	47	21

*All models UL listed at 115 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220V.

**Inlet plug is NEMA5-15P configuration. Plug ends not set up for 20 amp.

POWER CORD & CABLE REEL SELECTION CHART For indoor non-weather tight applications only

MODEL	ACCESSORY	REEL CAPABILITIES solid w/o cable				VOLTS *	AMPS	WEIGHT	
		AWG / mm ²	No. Cond.	Length ft / m	Type			lbs / kg	
L 4000	Reel w/o electric cord	16 1.33	3	50 15	SJO	115	13	22	10
L 4100	Reel w/o electric cord	16 1.33	4	40 12	SJO	115	13	22	10
L 4500	Reel w/o electric cord	12 3.32	3	45 14	SJO	115	25	21	9
L 5000	Reel w/o electric cord	10 5.27	3	35 11	SO	115	35	29	13
L 5400	Reel w/o electric cord	12 3.32	3	35 11	SO	115	25	25	12
L 5500	Reel w/o electric cord	12 3.32	3	50 15	SO	115	25	34	15
L 5700	Reel w/o electric cord	10 5.27	3	50 15	SO	115	35	37	17
L 7000	Reel w/o electric cord	6 13.3	4	35 11	SO	220	50	41	19

*All models UL listed at 115 Volt 60 HZ single phase; suitable for 220 V. For indoor use only.

LIGHT STYLE OPTIONS

Fluorescent Light

Style #2

- Durable shock absorbing lamp holder
- Shatter-resistant tube with switch



Style #8 ▲

- One foot #16/3 conductor SJTOW-A yellow cord with molded NEMA 5-15P plug
- 120v-15amp receptacle is located in line on cord
- SAF-T-TIE keeps the light plugged into receptacle
- Scratch guard protects lamp cover
- Order model 1 163 3 8

▼ Style #6

- Explosion Proof 13 watt fluorescent hand lamp
 - Automatic on/off switch at reel guide arm
 - Suitable for Class 1, group C & D locations
- Note: Reel is not explosion-proof.

Incandescent Hand Lamps

Style #5

- Rubber handle with vinyl-coated cage
- W/O switch or receptacle
- Automatic on/off switch at reel guide arm
- Complies with NEC #511-3.1, portable lighting equipment.
- Meets OSHA requirements.

Style #1 ▲

- Single receptacle tool tap
- Push-through switch
- Metal grounded guard.



UL LISTED



CSA CERTIFIED




L 4050 163 1

Note: Reel is not explosion proof

Five retractable light cord options

Illuminate your work area with incandescent, fluorescent or explosion-proof hand lamps

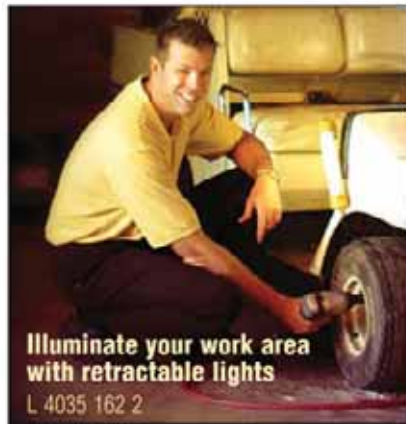

Illuminate your work area with retractable lights

L 4035 162 2

Auto-Switch Light Cord Reels

Models equipped with an automatic on/off switch incorporate a guide arm mounted switch that activates power with a pull of the cord.



L 5245 A 163 6X

LIGHT CORD REEL SELECTION CHART For indoor non-weather tight applications only

MODEL	ACCESSORY	CORD SPECIFICATIONS				VOLTS	AMPS	WEIGHT	
		AWG / mm ²	No. Cond.	Length ft / m	Type			lbs	kg
L 4035 163 1	*Incandescent	16 1.33	3	35 11	SJTOW	115	13	22	10
L 4050 163 1	*Incandescent	16 1.33	3	50 15	SJTOW	115	13	23	11
L 4035 A163 5**	*Incandescent	16 1.33	3	35 11	SJOW	115	15	25	12
L 5245 A163 6X**	Fluorescent	16 1.33	3	45 14	SEOW	115	0.3	32	15
L 4035 162 2	Fluorescent	16 1.33	2	35 11	SJTOW	115	0.3	23	11
L 4050 162 2	Fluorescent	16 1.33	2	50 15	SJTOW	115	0.3	24	11
L 4035 163 8	Fluorescent Light & Outlet	16 1.33	3	35 11	SJTO	115	0.3	26	11
L 4050 163 8	Fluorescent Light & Outlet	16 1.33	3	50 15	SJTO	115	0.3	27	12

* Incandescent bulb 75 watt maximum. All models UL listed at 115 Volt 60 HZ single phase. Base power cord reels without cord ends are suitable for 220 V. For indoor use only. See accessories page for optional mounting brackets and bases.

**Models are equipped with automatic on/off switch that activates power.



L 4035 162 2